




Patent
No.M417975
No.M419629



IK-618L-RV(NC)

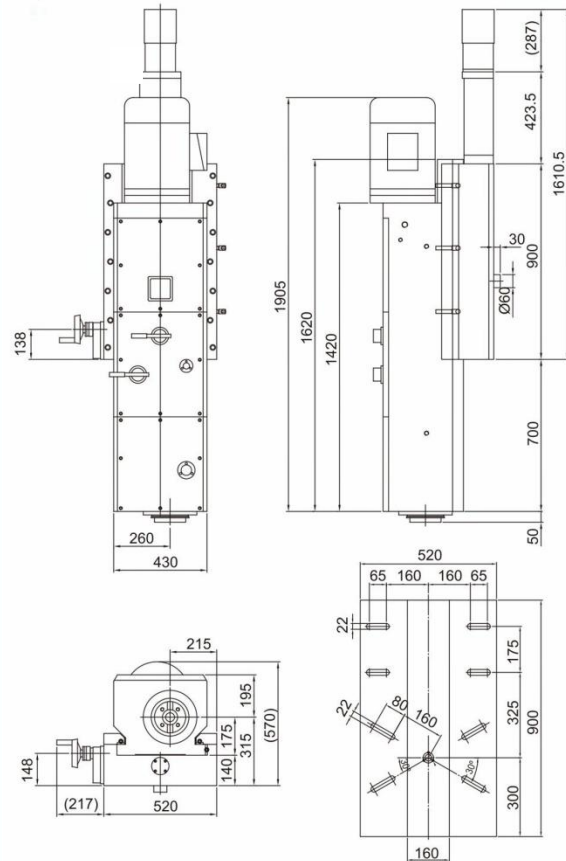



SPECIFICATION

MODEL	Unit	IK-618L-RV(NC)	
Spindle			
Spindle Bore Diameter		NT50	
Diameter of Spindle Nose	mm	Φ128.6	
Spindle Motor	Hp	15(4P)	20(4P)
Step of Spindle Speed	stage	6	
Spindle Speed (50Hz)	rpm	110	326
		166	450
		220	675
Spindle Speed (60Hz)	rpm	132	392
		200	541
		265	810
Working Range			
Max Diameter of Cutter	mm	250	
Travel	mm	700(down)	
Rapid Travel AC Motor		0.75Kw/1Hp AC 3 Phase 4 Poles x 1/20	
Rapid Travel Speed	mm/min	358(50Hz)	
		428(60Hz)	
Reversal Slide		0.5mm/rev → ← 0.01mm	

※We reserve the right to modify the design and specifications without notice in advance.



STANDARD ACCESSORIES		
	15HP / 4P	20HP / 4P
Spindle Motor	●	-
	-	●
Rapid Travel AC Motor		●
Bearing Guide Screw		●
OPTIONAL ACCESSORIES (APOLEGAMY)		
Pneumatic Blade Locking Device		○
Pneumatic Leveler		○
IK-A90 Angular Head		○
IK-D90 Deep Head		○
IK-U90 Universal Head		○
IK-U45 Universal Head		○
Place of Origin	Taiwan	
Weight (Approximate)	kg	1300
Warranty	1 year (non artificial mistake)	

※We reserve the right to modify the design and specifications without notice in advance.

